

## KINEMATICS OF MATERIAL REMOVAL AND FORMING OF SURFACE AT GRINDING

**Novikov Feodor Vasilyevich, doctor of technical Sciences, professor**

Kharkiv National University of Economics

9a Lenin Avenue, Kharkov, Ukraine, 61001, [fokusnic1@rambler.ru](mailto:fokusnic1@rambler.ru)

### *Аннотация*

**Новиков Федор Васильевич, докт. техн. наук, профессор**

Харьковский национальный экономический университет,

**Кинематика съема материала и формообразования поверхностей при шлифовании**

*Разработана математическая модель кинематики съема материала и формообразования поверхностей при шлифовании. Определены условия повышения производительности обработки и предложены новые кинематические схемы высокопроизводительного шлифования*

**Ключевые слова:** *шлифование, скорость круга, производительность обработки, толщина среза*

### *Annotation*

**Novikov Feodor Vasilyevich, doctor of technical Sciences, professor**

Kharkiv National University of Economics

**Kinematics of material removal and forming of surface at grinding**

*The mathematical model of kinematics of material removal and a forming of surfaces is developed at grinding. Conditions of increase of productivity of processing are defined and new kinematic schemes of high-performance grinding are offered.*

**Keywords:** *grinding, circle speed, processing productivity, thickness of cut.*

Grinding is one of the main methods of machining of the materials, providing high rates of accuracy, quality and productivity of processing [1, 2]. At the same time, its technological capabilities fully aren't used due to the lack scientifically reasonable recommendations about a choice of optimum modes of cutting taking into account strength properties of a working surface of a circle. In a special measure it belongs to diamond grinding which owing to unique cutting properties of diamond has considerable reserves of increase of productivity of processing when providing requirements for quality and accuracy of processed surfaces [3]. It is important to know first of all regularities material removal and formation of surfaces at grinding at the level of kinematics of microcuts for identification of realization of potential opportunities of process of grinding. It will allow to develop high-performance kinematic schemes of grinding and to define optimum modes of cutting. Therefore the purpose of work is development of mathematical model of kinematics of material removal and a forming of surfaces at grinding.

The removed allowance is presented in the offered settlement scheme of process of grinding by a package of infinitely thin cylindrical covers which under different corners enter into a working surface of a circle (fig. 1 [4]). As a result of interaction of cylindrical covers with grains, from each cover there is the cutting of metal described by probabilistic function – relative completeness of a profile of a circle. On construction structure this function corresponds to the classical relative basic length of a microprofile of the processed surface [5] and considers probabilistic imposing and overlapping of projections of grains on each of considered cylindrical covers:

$$\varepsilon_n(y) = 1 - \exp \left\{ - \frac{\sqrt{2} \cdot \text{tg} \gamma \cdot k \cdot V_c}{3 \cdot b \cdot V_{pr} \cdot \sqrt{\rho}} \cdot \left[ \frac{y^3}{2 \cdot \sqrt{t_{nT}}} + \sum_{i=0}^{n-2} t_{iT}^{5/2} \right] \right\}, \quad (1)$$

where  $k$  - superficial concentration of grains of a circle, piece/ m<sup>2</sup>;  $b$  - the maximum height of a protrusion of tops of grains over level of a linking of a circle, m;  $2\gamma$  - corner at top of cone-shaped cutting grain;  $V_c, V_{pr}$  - according to the speed of a circle and preparation, m/s;  $\rho = 1/R_c + 1/R_{pr}$ ;  $R_c, R_{pr}$  - respectively radiuses of a circle and preparation, m;  $t_{iT} = t_T + i \cdot t$  - cover coordinate at  $i$  contact with a circle, m;  $t_{nT} = t_T + (n-1) \cdot t$  - cover coordinate at  $n$  contact with a circle, m;  $t_T$  - coordinate of the current infinitely thin cover by which the removed allowance is conditionally presented, to m;  $n$  - number of passes of a circle.

The basis of the developed mathematical model of grinding is made by the analytical decision on the description of border of completion of dispergating by cutting grains of the material brought in a zone of cutting, along an arch of contact of a circle with preparation:

$$H = \sqrt[3]{2} \cdot \sqrt[6]{t_{nT}} \cdot \sqrt[3]{\frac{H_{max}^3}{2 \cdot \sqrt{t_{nT_{extr}}}} + \sum_{i=0}^{n-2} t_{iT_{extr}}^{5/2} - \sum_{i=0}^{n-2} t_{iT}^{5/2}}, \quad (2)$$

where  $H_{max}$  - the maximum thickness of a cut, m;  $t_{nT_{extr}}$  - coordinate of extreme provision of a cover at which the full profile  $\varepsilon_n(y) = 0,95$  is formed at level  $H_{max}$ , m;  $t_{iT_{extr}}$  - coordinate of extreme provision of a cover at  $i$  contact with a circle, m.

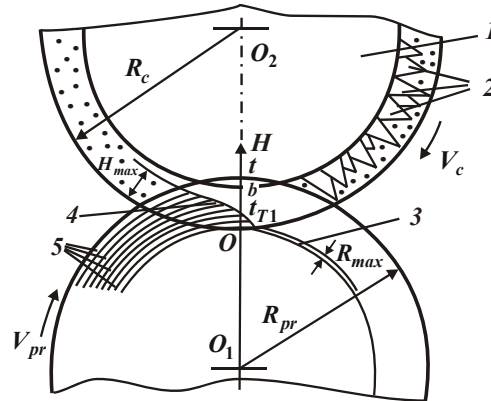


Fig. 1. The settlement scheme of characteristic points of a probabilistic surface of cutting at grinding: 1 – circle; 2 – cutting grains of a circle; 3 – layer of a residual roughness of the processed surface; 4 – the provision of a probabilistic surface of cutting at grinding; 5 – infinitely thin cylindrical covers of a removed allowance.

As shown in fig. 1, this line is drawn on tops of microroughnesses of a processed material, has a difficult configuration, connects a processed surface with processed and by analogy to blade processing determines the provision of a conditional probabilistic surface of cutting at grinding. Characteristic points of border are a basis for calculation of physical and technological parameters of grinding (the maximum thickness of a cut, a roughness of the

processed surface, the actual length of contact of a circle with preparation, etc.). It allows from uniform positions quite unambiguously analytically to describe regularities of process of grinding in all possible range of change of depth of grinding (including ranges of multipass and deep grinding).

By calculations it is established that the provision of border is defined by a ratio of two parameters – maximum (given probabilistic) thickness  $H_{max}$  of a cut and grinding depth  $t$ . In a case  $t < H_{max}$  (multipass grinding) the border accepts approximately a symmetric form of rather axial plane of grinding, in a  $t > H_{max}$  (deep grinding) – an asymmetric form.

By calculations it is established that the percent of working grains for a case  $t > H_{max}$ ; makes about 50%, and for a case  $t < H_{max}$  – 5 ... 10% (i.e. grains pass almost "a trace in a trace" that as it will be shown above, is an important reserve of increase in productivity of processing).

In a case  $t > H_{max}$  analytical dependence for definition of provision of border assumes a simple air

$$H = H_{max} \cdot \sqrt[6]{\frac{t_T}{t}}, \quad (3)$$

where  $t_T$  – the coordinate of the current elementary (infinitely thin) cylindrical cover by which the removed allowance is conditionally presented in the settlement scheme, m.

Respectively, parameters of border  $H_{max}$  and  $R_{max}$  (parameter of a roughness of processing, m) are described by analytical dependences

$$H_{max} = \left( \frac{630 \cdot \pi \cdot \bar{X}^3 \cdot V_{pr} \cdot t^{0,5} \cdot \rho^{0,5}}{m \cdot V_c} \right)^{0,33}; \quad (4)$$

$$R_{max} = 10 \cdot \left( \frac{\pi \cdot \bar{X}^3 \cdot V_{pr} \cdot \rho^{0,5}}{m \cdot V_c} \right)^{0,4}, \quad (5)$$

where  $\bar{X}$  - granularity of a circle, m;  $m$  - volume concentration of grains in a circle (dimensionless size).

Table 1

Calculated values of thickness of a cut  $H_{max}$  (basic data:  $R_{pr} = 80 \cdot 10^{-3}$  m;  $R_c = 150 \cdot 10^{-3}$  m;  $\bar{X} = 0,225 \cdot 10^{-6}$  m;  $m = 100$ ;  $V_c = 30$  m/s;  $V_{pr} = 1$  m/min;  $t = 0,1 \cdot 10^{-3}$  m)

Authors	Novikov F.V.	Maslov E.N.	Lurye G. B.	Reznikov A.N.	Experiment data
$H_{max}$ , MKM	14,7	0,007	0,12	1,1	10,5

1 values of thickness of the cut given in tab., received on settlement dependences of a number of authors, show on a big divergence of settlement and experimental data. For example, for the settlement dependence offered by prof. Maslov E.N. this divergence exceeds 1000 times. The most correct result is received with use of dependence (4). The divergence of

calculated and experimental values available here  $H_{max}$  (to 40%) is connected with that in kinematic model of process of grinding wear of grains of a circle isn't considered. For the purpose of specification of the received results settlement dependences which contain the new dimensionless parameter  $\eta = x / H$  defining degree of linear wear of grains and changing within 0 ... 1 (for "sharp" grain  $\eta \rightarrow 0$ , for become blunted  $\eta \rightarrow 1$ ) are established:

$$H_{max} = \left[ \frac{630 \cdot \pi \cdot \bar{X}^3 \cdot V_{pr} \cdot t^{0,5} \cdot \rho^{0,5} \cdot (1-\eta)^2}{m \cdot V_c \cdot (1+\eta)} \right]^{0,33} ; \quad (6)$$

$$R_{max} = 10 \cdot \left[ \frac{(1-\eta)^2}{(1+\eta)} \cdot \frac{\pi \cdot \bar{X}^3 \cdot V_{pr} \cdot \rho^{0,5}}{m \cdot V_c} \right]^{0,4} . \quad (7)$$

Taking into account parameter  $\eta$  ( $\eta > 0$ ) values also decrease. Therefore, decreases (and even it is eliminated) a divergence between calculated and experimental values  $H_{max}$  (tab. 1). Comparison of experimental values of the maximum thickness of shaving with the corresponding calculated values of parameter  $H_{max}$  showed their approximate coincidence at  $\eta=0$ , 2 (tab. 2). It follows from this that the accounting of size of linear wear of grain  $x$  (by means of parameter  $\eta$ ) in settlement dependences allows to bring the theory and practice of grinding into accord.

Table 2

Calculated values  $H_{max}$  and experimental values of the maximum thickness of shavings in mm ( $m=100$ ;  $\bar{X}=0,2 \cdot 10^{-6}$  m;  $V_c=30$  m/s;  $R_{pr}=0,02$  m;  $R_c=0,15$  m)

№	Grinding modes		$\eta$			Maximum thickness of shaving, mm
	$t$ , mm	$V_{pr}$ , m/min	0	0,2	0,5	
1	0,05	0,5	0,0130	0,010	0,0071	0,013
2	0,05	0,8	0,0154	0,0124	0,0034	0,013
3	0,05	1,0	0,0167	0,0135	0,0091	0,013
4	0,05	2,0	0,021	0,0170	0,0115	0,013
5	0,1	0,5	0,0148	0,0119	0,0081	0,014
6	0,1	1,0	0,0187	0,0151	0,0102	0,015
7	0,1	2,0	0,0236	0,0191	0,0129	0,014
8	0,2	0,5	0,0167	0,0135	0,0091	0,015
9	0,2	1,0	0,0210	0,0170	0,0115	0,017

From all the entering into dependences (6) and (7) parameters, the greatest influence on  $H_{max}$  and  $R_{max}$   $\eta$  renders. It indicates a prevailing role of size  $\eta$  in formation of the key physical and technological parameters of grinding and confirms the made hypothesis of effective management of grinding process on the basis of size regulation  $\eta$ . For its realization the greatest possible productivity of processing caused by strength properties of a working surface of a circle is determined, i.e. at the fixed (limit) area of cross section of a cut by separate grain  $S = 0,5 \cdot \psi \cdot H_{max}^2 \cdot \frac{(1+\eta)}{(1-\eta)}$  and  $\eta=0$ :

$$Q = \frac{\sqrt{2} \cdot m \cdot V_c \cdot B}{450 \cdot \pi \cdot \bar{X}^3} \cdot \sqrt{\frac{t}{\rho}} \cdot \left[ \frac{H_{max}^3}{2 \cdot \sqrt{t_{nT}}} + \sum_{i=0}^{n-2} t_{iT}^{5/2} \right], \quad (8)$$

where  $B$  - width of a circle, m.

Values of the parameter defining percent of working grains, are given in tab. 3.

Table 3

Calculated values  $\psi$  at  $H_{max} = 10 \cdot 10^{-6}$  m

$t \cdot 10^{-6}, \text{m}$	1	5	10	50	100
$\psi, \%$	6,65	15,25	43,19	44,0	44,0

It is theoretically established that generally processing productivity  $Q$  with increase in depth of grinding  $t$  changes on extreme dependence, passing a point of a minimum (fig. 2). Preparation speed  $V_{pr} = Q/B \cdot t$  thus continuously decreases. It is proved that depth of grinding  $Q$  is equal in a minimum point  $t$  to parameter  $H_{max}$ . It corresponds to transition from the scheme multipass ( $t < H_{max}$ ) to the scheme of traditional deep grinding ( $t > H_{max}$ ).

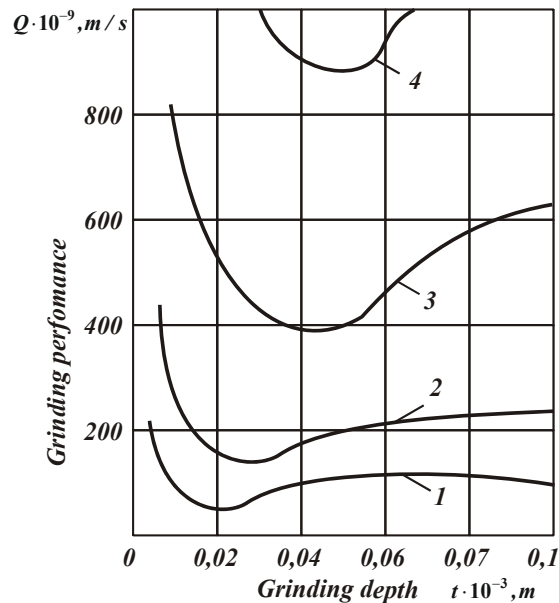


Fig. 2. Dependence grinding performance  $Q$  on grinding depth  $t$ . Basic data:  $m = 100$ ;  $\bar{X} = 0,2 \cdot 10^{-3}$  m;  $B = 22,5 \cdot 10^{-3}$  m;  $\rho = 17 \text{ m}^{-1}$ ;  $V_c = 30 \text{ m/s}$ ; 1 -  $S = 400 \text{ mkm}^2$ ; 2 -  $S = 900 \text{ mkm}^2$ ; 3 -  $S = 1600 \text{ mkm}^2$ ; 4 -  $S = 2500 \text{ mkm}^2$ .

From the physical point of view the minimum of productivity of processing  $Q$  under a condition  $S = \text{const}$  is caused by existence of the shortest on the shaving length  $\Delta l$  (considering productivity of processing proportional  $S \cdot \Delta l$ ) as with increase and reduction of depth of grinding  $t$ , since value  $t = H_{max}$ , length of shaving  $\Delta l$  increases. In the first case – at

the expense of increase in length of an arch of contact of a circle with preparation, in the second case – at the expense of increase  $V_{pr}$ .

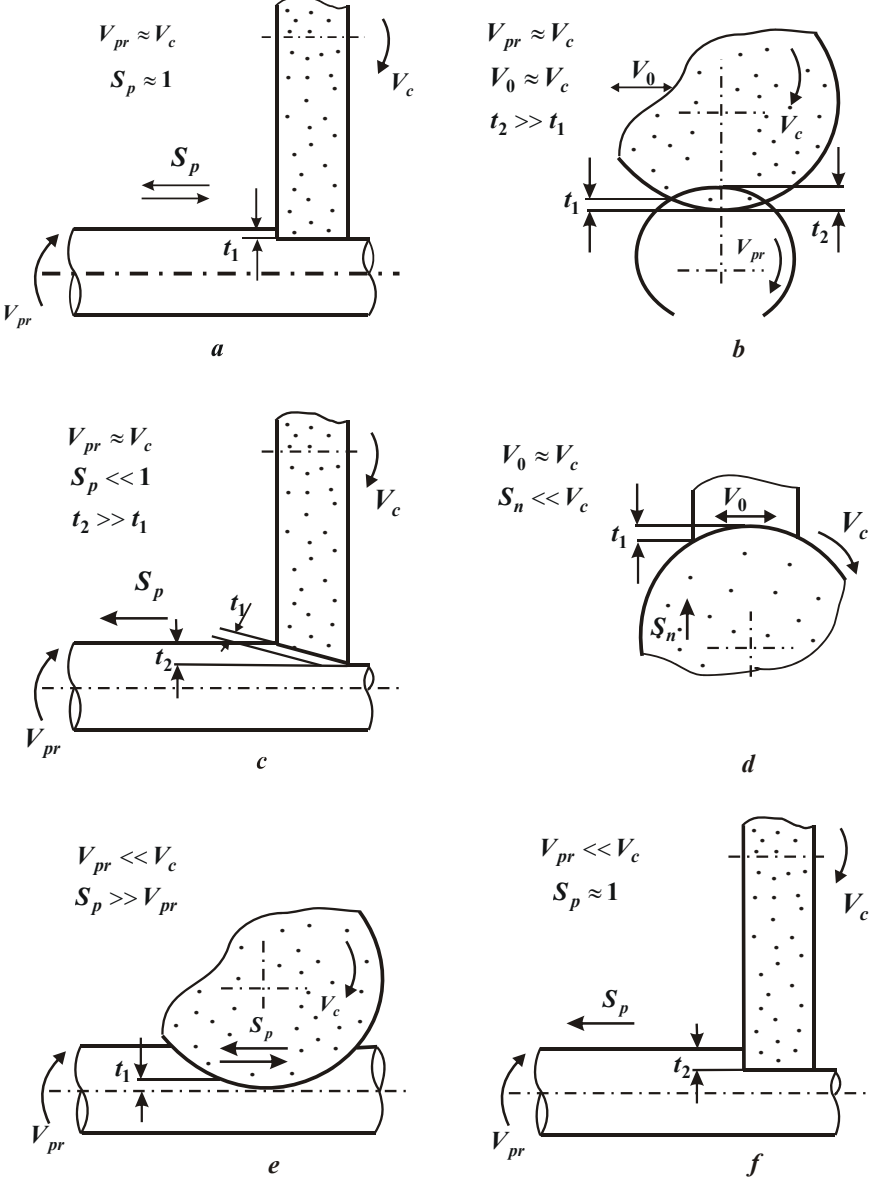


Fig. 3. High-performance ways of grinding

The carried-out analysis of known methods of diamond and abrasive grinding showed that all of them, as a rule, realize a condition  $t = H_{max}$ , i.e. a minimum of productivity of processing  $Q$ . Obviously, for abrasive grinding it is effective since at the expense of action on grains of big loadings the mode of intensive self-sharpening of a circle is provided and its high cutting ability is maintained. For diamond grinding this condition results in the increased wear of a circle that, actually, and predetermines low efficiency of application of diamond circles at high-performance grinding and inexpediency of their use instead of usual abrasive circles at removal of big allowances.

The received extreme dependence  $Q-t$  defines kinematic conditions of essential increase of productivity the processings consisting in realization of new ratios between

parameters  $t$  and  $H_{max}$  ( $t < H_{max}, t > H_{max}$ ), i.e. in realization of the left and right branches of dependence (fig. 2).

On this basis the new ways of grinding realizing the left branch of dependence are developed  $Q-t$ . They are based on application of schemes multipass (fig. 3a) and deep (fig. 3c) round external grinding with rather high speed of the preparation close to speed of a circle; schemes of deep round external grinding by the circle periphery with rather small speed of preparation and big longitudinal giving (fig. 3e); schemes of deep round external grinding with rather small speed of preparation and additional tangential high-frequency movements of a circle of big amplitude (fig. 3b); schemes of deep flat face grinding with use of additional high-frequency oscillating motions of a circle or preparation in the direction, perpendicular to the direction of giving of a circle (fig. 3d).

It is established that efficiency of grinding in this case is caused by passing of grains almost "a trace in a trace" and possibility of increase  $H_{max}$  at the fixed value  $S$  (i.e. the loading operating on grain) that allows message processing with a high speed of a circle  $V_c$  – to 600 m/s and above. Application of such conditions will provide increase in productivity of processing by 10 times and more that will well be coordinated with experience of leading machine-tool constructing firms which came for creation of grinders with a speed of circle up to 300 m/s. Implementation of the offered schemes of grinding assumes development of the new machines providing big speeds of a circle and preparation. It will allow to change the content of grinding operations cardinally.

#### Список литературы

1. Маслов Е.Н. Теория шлифования металлов / Е.Н. Маслов. – М.: Машиностроение, 1974. – 319 с.
2. Лурье Г.Б. Шлифование металлов / Г.Б. Лурье. – М.: Машиностроение, 1969. – 197 с.
3. Якимов А.В. Абразивно-алмазная обработка фасонных поверхностей / А.В. Якимов. – М.: Машиностроение, 1984. – 212 с.
4. Новиков Ф.В. Физические и кинематические основы высокопроизводительного алмазного шлифования: автореф. дис. на соискание научн. степени докт. техн. наук: спец. 05.03.01 "Процессы механической обработки, станки и инструменты" / Ф.В. Новиков. – Одесса, 1995. – 36 с.
5. Технологические методы повышения износостойкости деталей машин / Рыжов Э.В. – К.: Наук. Думка, 1984. – 272 с.

#### List of references

1. Maslov E.N. Teoriya shlifovaniya metallov / E.N. Maslov. – M.: Mashinostroenie, 1974. – 319 s.
2. Lurye G.B. shlifovanie metallov / G.B. Lurye. – M.: Mashinostroenie, 1969. – 197 s.
3. Yakimov A.V. Abrazivno-almaznaya obrabotka fasonnykh poverkhnostey / A.V. Yakimov. – M.: Mashinostroenie, 1984. – 212 s.
4. Novikov F.V. Fizicheskiye i kinematcheskiye osnovy vysokoproizvoditelnogo almaznogo shlifovaniya: avtoref. dis. na soiskaniye nauchn. stepeni dokt. tekhn. nauk: spets. 05.03.01 "Protssesy mekhanicheskoy obrabotki, stanki i instrumenty" / F.V. Novikov. – Odessa, 1995. – 36 s.
5. Tekhnologicheskiye metody povysheniya iznosostoykosti detaley mashin / Ryzhov E.V. – K.: Nauk. dumka, 1984. – 272 s.